

Monitor Quick Connect

Simple, fast and effective connect/disconnect system.

The Quick Connect Coupler is a custom designed accessory for quick, easy installation and removal of Elkhart Brass monitors. Once the 2.5" Quick Connect Coupler is installed, no tools are required to operate. It only requires a 1/3 rotation to lock or unlock the monitor into place; essentially creating a Plug-and-Play scenario. A patented safety lock mechanism prevents accidental disconnects while waterway is pressurized.



500 PSI Operation



Durable Elk-O-Lite Aluminum Construction



NEMA 4 Environmental Rating



DEVELOPED AS A FAST & EFFECTIVE WAY TO SWAP OR STORE WATER MONITORS.

QUICK ON. QUICK OFF.


Monitor Quick Connect

Simple connect/disconnect system.


The Quick Connect Coupler doesn't have a specific direction of flow, and can be installed onto plumbing in either direction.

[May require additional adapters. Not provided by Elkhart Brass]

4.72"

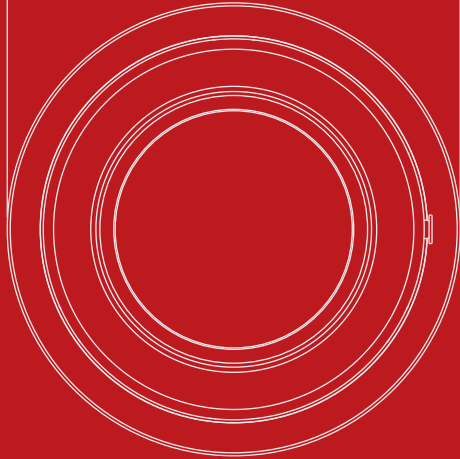

Monitor Side - Male

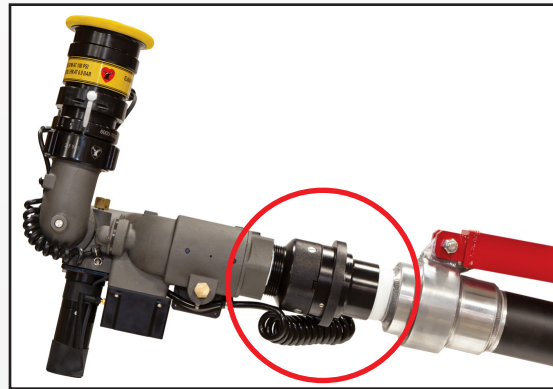

Monitor Side - Female



Quick Connect Specifications:

- Model 7150
- Max Pressure 500 PSI
- Inlet 2.5" NPT Female
- Outlet 2.5" NPT Male
- Weight 2.8 LBS.
- Environmental Rating NEMA 4

Quick Connect - Pieces Separated



6.47"

