

HANDLINE NOZZLES




SELECT-O-FLOW®

Select-O-Flow®

Select-O-Flow®, the original selectable gallonage nozzle, is similar in function to the Phantom® — allowing the firefighter to select the appropriate flow. The Select-O-Flow® range goes as high as 250 gpm.

HANDLINE NOZZLES

1-17

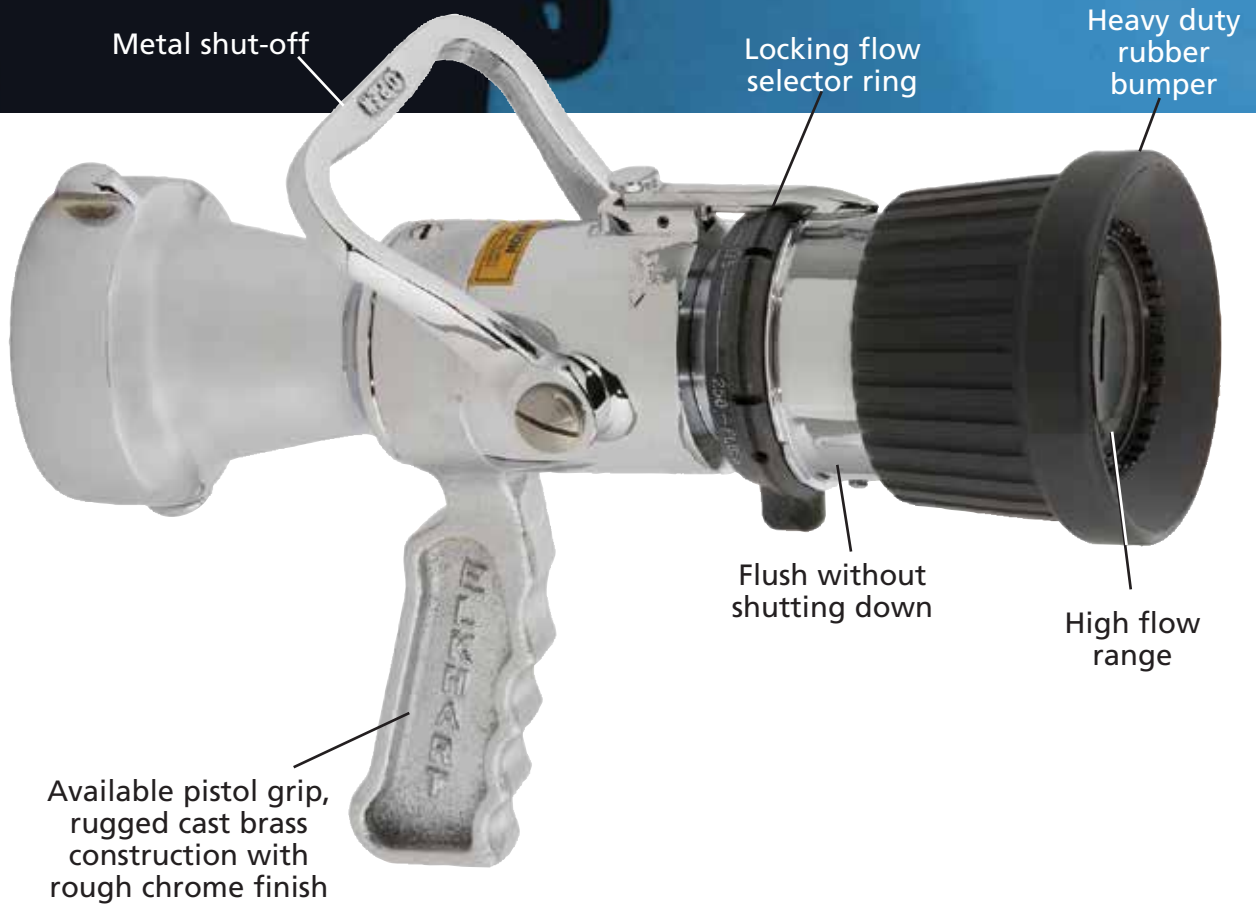


British Standard Parallel Pipe (BSPP) and British Instantaneous (BS336) base options available.

ELKHART BRASS MFG. CO., INC. • 800.346.0250 • 1.574.295.8330 • FAX: 574.293.9914 • www.elkhartbrass.com

Base Size	FLOW RATE	SHUT-OFF		HANDLE		BASE			TEETH			DIMENSIONS		MODEL
	GPM (LPM) PSI (BAR) 100 (6.89)	Twist	Ball	Tab	Horseshoe	Rigid	Swivel	Free Swivel	Molded Urethane	Spinning	Rigid Metal	Length (Inches)	Weight (Lbs.)	
1.5"	40/60/95/125 (151/227/360/473)	•					s				s	6.50	2.75	TSFL-O
	125/175/250 (473/662/946)	•					s				s	7.00	5.50	TSF
1.5"	40/60/95/125 (151/227/360/473)	•	o	s			s	o	o	s		7.625	7.75	SFL-B
	125/175/250 (473/662/946)	•		s	o	s	o				s	7.00	3.75	SFL-O
1.5"	125/175/250 (473/662/946)	•		s	o	s	o				s	8.00	8.00	SF
	125/175/250 (473/662/946)	•		s	o	s	o				s	10.75	10.00	DSF
1.5"	40/60/95/125 (151/227/360/473)	•	o	s			s	o	s		s	8.375	9.625	SFL-BG
	125/175/250 (473/662/946)	•		s	o	o	s				s	10.00	4.875	SFL-OG
1.5"	125/175/250 (473/662/946)	•		s	o	o	s				s	11.25	8.875	SF-G
	125/175/250 (473/662/946)	•		s	o	o	s				s	13.875	10.875	DSF-G

Key: s = standard o = option

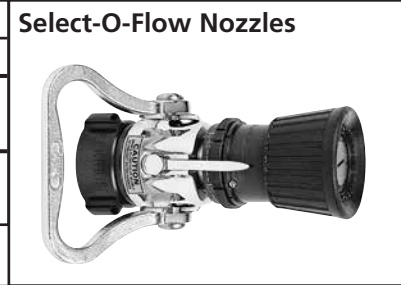

Figures depict general product types only and are not intended to be inclusive of all product features.

OPTIONS

HANDLES

TAB



HORSESHOE



- SFL-B, SFL-BG, SFL-O, SFL-OG all feature aluminum/bronze shut-off handles
- DSF, DSFG, SF, SF-G, STDSF, SF-800 all feature manganese/bronze shut-off handles

MOLDED URETHANE TEETH



THREADS

All nozzles are NHT unless otherwise specified. See index T-13 for optional base threads, including British instantaneous.