


MASTER STREAM



SELECT-O-FLOW®

MASTER STREAM

Select-O-Flow®

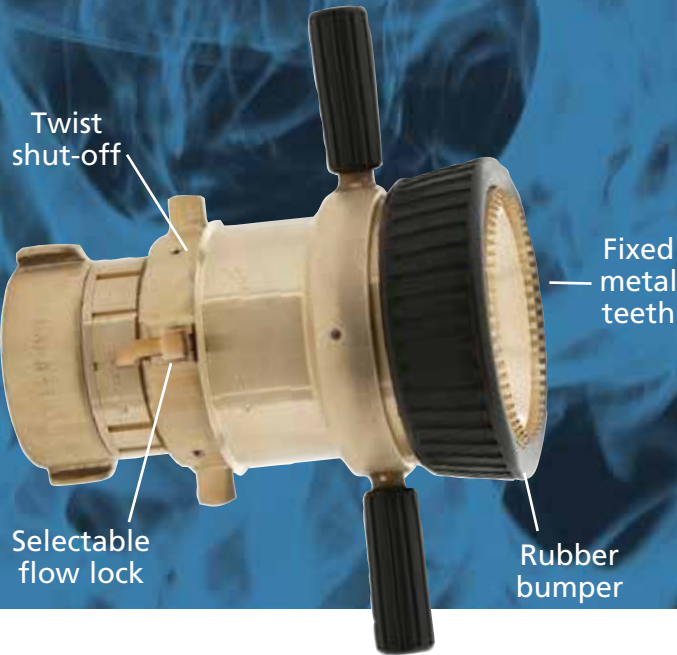


- Selectable flow rate, changeable even during flowing conditions
- Constant flow nozzle — straight stream, narrow fog (30°), or wide fog (90°)
- Flow efficient with a fully machined waterway for excellent stream quality
- Construction:
 - Elk-O-Lite® nozzles are hard anodized with chrome-plated trim and rubber bumper
 - Corrosion resistant brass nozzles have a heavy-duty protective rubber bumper
- Low maintenance components
- AFFF compatible

6-13

Base Size	FLOW RATES	PRESSURE	MATERIAL		Effective Reach (Feet) @ Highest Flow	Weight (Lbs.)	MODEL	FIGURE
			Brass	Elk-O-Lite®				
2.5"	GPM (LPM)	100 (6.89)						
	300/550/750 (1136/2082/2839)		•	221	7.6	CSW	1	
	350/500/750/1000/1250 (1325/1893/2839/3785/4732)		•	350	10.0	CSW-L	1	
			•	350	21.4	CSW-LB	2	

SELECT-O-FLOW® CONFIGURATIONS

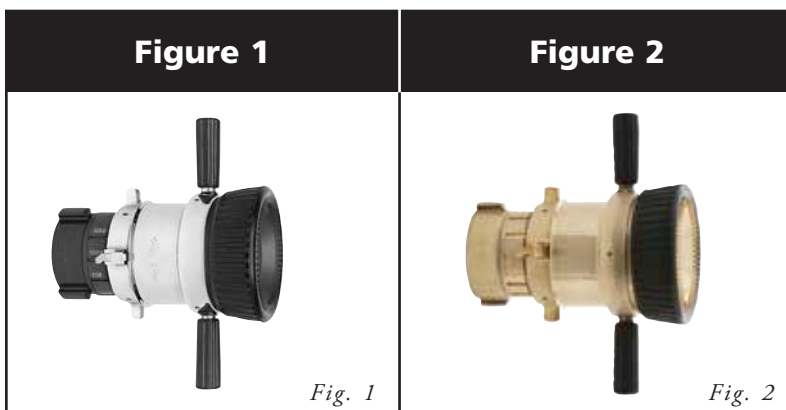

OPTIONS
THREADS
<p><i>All nozzles are NHT unless otherwise specified. See index T-13 for optional base threads.</i></p>