


# HANDLINE NOZZLES



SELECT-O-STREAM®

## Select-O-Stream®

An industry standard for over 40 years, the Select-O-Stream® delivers constant gallonage at every pattern level, from straight stream to full fog. The rugged all brass construction with chrome finish has a proven record of standing up to corrosive conditions. The variety of available gpm options with the Select-O-Stream® allows for customized choices to match the needs of fire professionals.

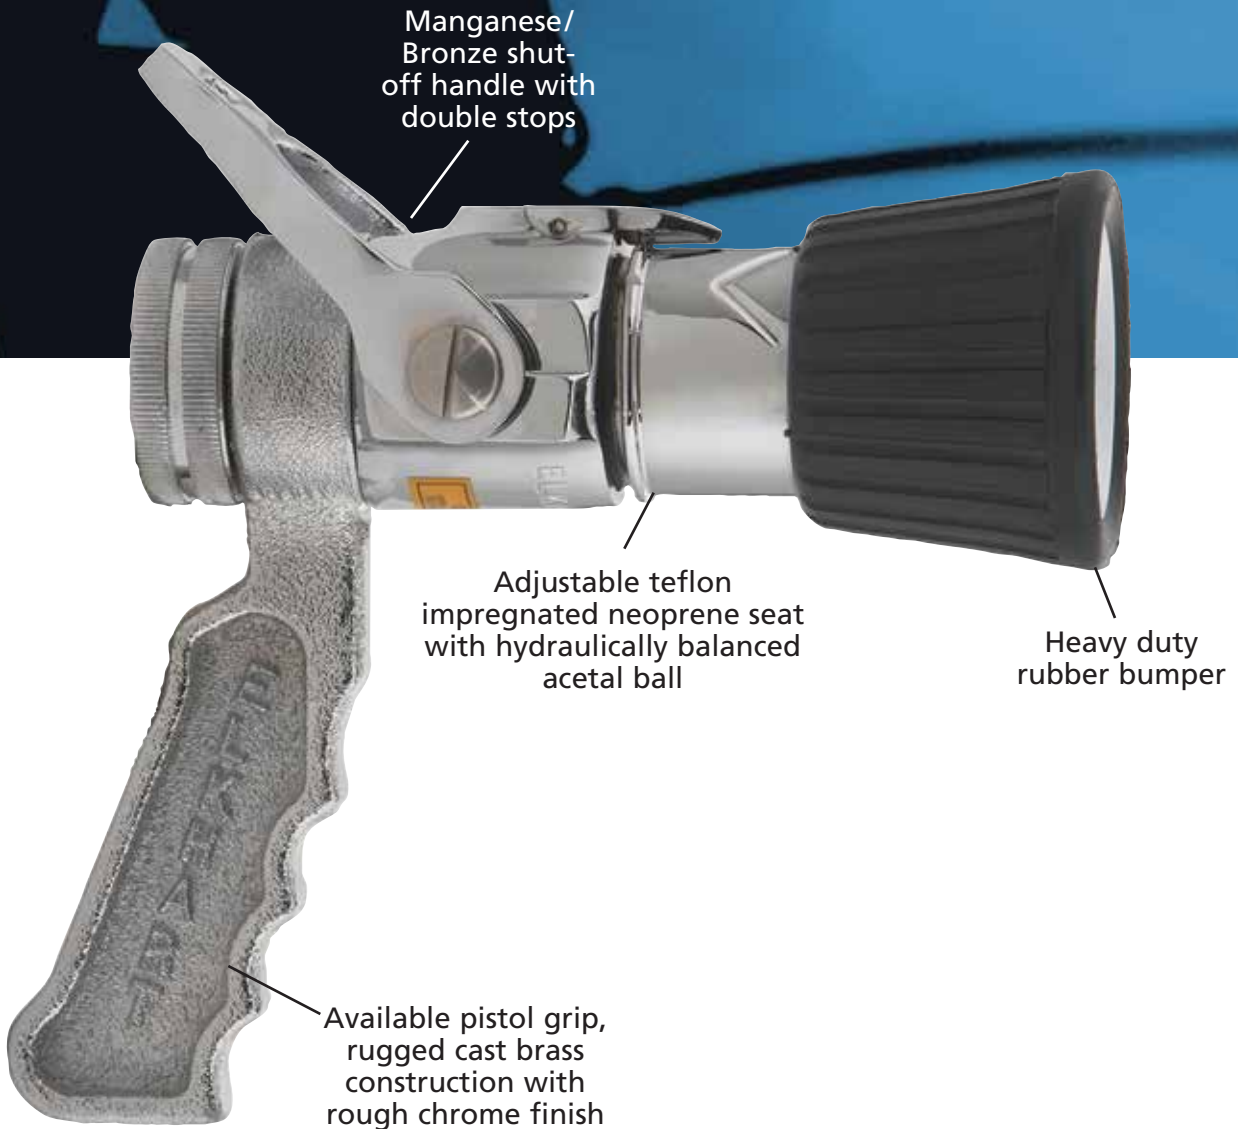

HANDLINE NOZZLES

1-21

British Standard Parallel Pipe (BSPP) and British Instantaneous (BS336) base options available.

ELKHART BRASS MFG. CO., INC. • 800.346.0250 • 1.574.295.8330 • FAX: 574.293.9914 • [www.elkhartbrass.com](http://www.elkhartbrass.com)

# HANDLINE NOZZLES

SELECT-O-STREAM®

Base Size	AVAILABLE STANDARD FLOW RATES GPM (LPM)					GRIP	FINISH		HANDLE	BASE			TEETH	DIMENSIONS		MODEL	
	60 (227)	95 (360)	125 (473)	170 (644)	250 (946)		Satin Brass	Chrome-Plated		Rigid	Swivel	Free Swivel		Cut Metal	Length (Inches)		Weight (Lbs.)
	PSI (BAR) 100 (6.89)																
1.5"	•	•	•			•	s	o	s	o	s	o	s	7.00	5.50	L-O	
	•	•	•			•	s	o	s		s	s		7.75	6.375	L-OG	

Key: s = standard o = option

## THREADS

All nozzles are NHT unless otherwise specified. See index T-13 for optional base threads, including British instantaneous.



Figures depict general product types only and are not intended to be inclusive of all product features.